


PU L FLEX HOSE

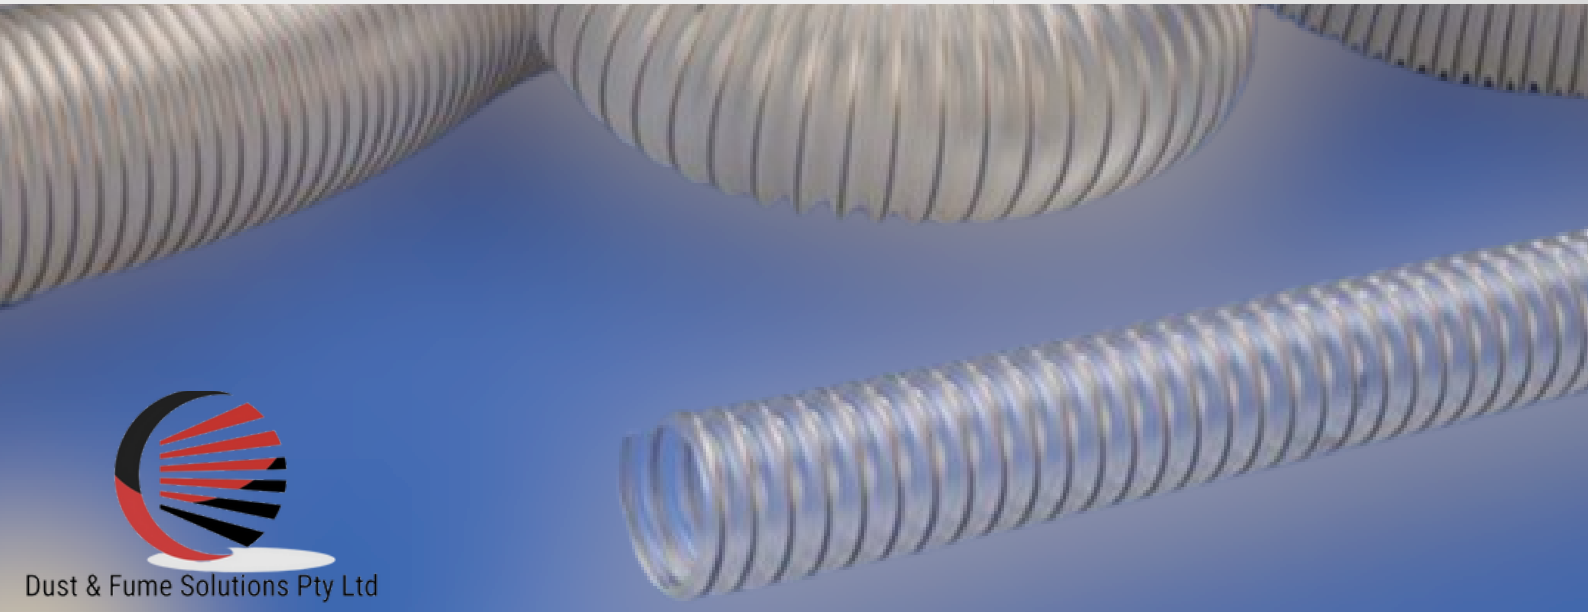

MATERIAL:

- Wall: ester-polyurethane
- Spiral: spring steel wire

CONSTRUCTION:

- Spring steel wire integrated in wall
- Wall thickness 0.4 mm approx.

STANDARD COLOR:

- Transparent

PROPERTIES:

- Optimized flow properties
- Good resistance to UV and ozone
- Small bending radius
- Kink-proof
- Gas and liquid tight
- Abrasion-proof
- Excellent compressibility 3:1
- Capable of electrostatic discharge by grounding the spiral
- Good tensile

TEMPERATURE RANGE:

- -40 °C approx. to +90 °C approx.
- Short time to +125 °C approx.

SPECIFICATION:

- \varnothing 51 to \varnothing 305 mm

APPLICATIONS:

- For abrasive solids such as dust, powder, fibers and chip
 - For industrial air movement and fume control
 - For extraction arms and dust collection equipment
 - For CNC machine
-
- 