


PVC FLEX HOSE

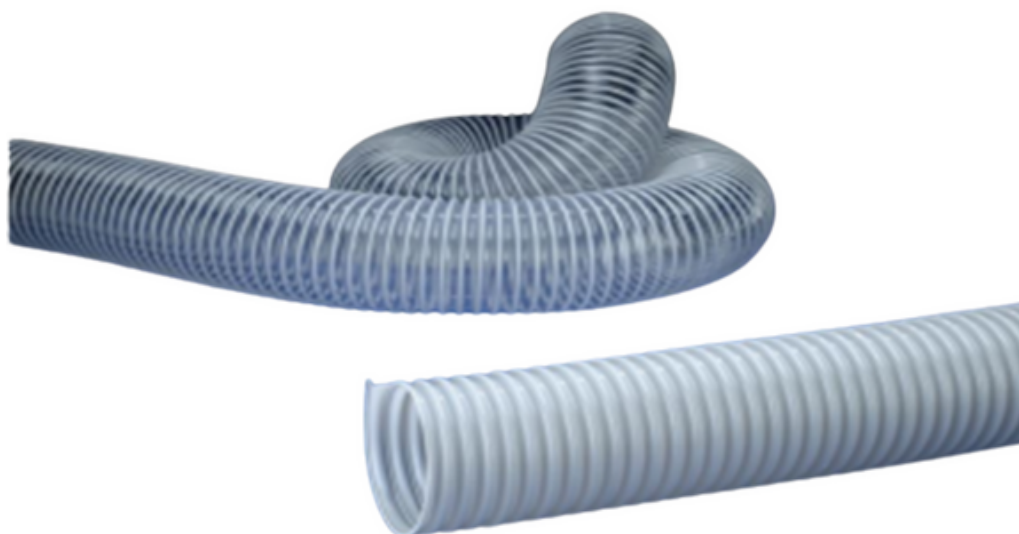

Dust & Fume Solutions Pty Ltd

MATERIAL:

- Wall: high-grade soft PVC
- Spiral: spring steel wire

WORKING TEMPERATURE:

- -10 °C approx. to +70 °C approx.
- Short time to +80 °C approx.

CONSTRUCTION:

- Spring steel wire integrated in wall.

STANDARD COLOR:

- Grey and transparent

SPECIFICATION:

- \varnothing 38 to \varnothing 254 mm

FEATURES:

- Good resistance to alkalis and acids
- Good resistance to chemicals
- Capable of electrostatic discharge by grounding the spiral
- Compressible 3:1
- Flame-retardant according to UL94-HB

APPLICATIONS:

- For powdery solids such as dust, powder and fibre
- For gaseous media such as vapor and smoke
- For air conditioning and ventilation technology

